

DRILLING BLOCKS AND TUBING BLOCKS



Ideco Provides a Complete Line of Drilling & Tubing Blocks

Ideco Shorty Traveling Blocks With Unitized Hook Specifications


Model	UTB-75 -2-24	UTB-75 -3-24	UTB-110 -3-24	UTB-110 -3-30	UTB-160 -3-30	UTB-160 -3-36	UTB-160 -4-30	UTB-160 -4-36	UTB-265 -4-36	UTB-265 -4-42	UTB-265 -5-36	UTB-265 -5-42	UTB-360 -5-42	UTB-360 -5-50	UTB-525 -6-50	UTB-525 -6-60
A.P.I. Working Load Strength Rating	75	75	110	110	160	160	160	160	265	265	265	265	360	360	525	525
A.P.I. Bearing Rating at 100 R.P.M.	80	120	190	190	190	190	255	255	340	340	425	425	425	425	630	630
Number of Sheaves	2	3	3	3	3	3	4	4	4	4	5	5	5	5	6	6
Diameter of Sheaves	24	24	24	30	30	36	30	36	36	42	36	42	42	50	50	60
Length Overall	6'0 3/4"	6'0 3/4"	7'6 1/2"	8'0 1/2"	9'1"	9'7"	9'1"	9'7"	10'6 1/4"	11'0 1/4"	10'6 1/4"	11'0 1/4"	12'11 3/8"	13'10 3/8"	14'5 3/8"	15'5 3/8"
Width Overall (Face)	16 1/2	16 1/2	17	17	19 1/4	19 3/4	19 3/4	19 3/4	26 5/16	26 5/16	26 5/16	26 5/16	28 5/16	28 5/16	32	32
Weight with Hook	2,255	2,385	4,050	4,425	6,200	6,700	6,285	7,000	11,000	11,950	11,300	12,250	13,100	15,700	20,400	23,900
	1,023	1,082	1,837	2,007	2,812	3,039	2,842	3,175	4,990	5,420	5,126	5,557	5,942	7,121	9,253	10,841

Ideco Shorty Traveling Blocks With Standard Clevis Specifications

Model	TB-265 -4-36	TB-265 -4-42	TB-265 -5-36	TB-265 -5-42	TB-360 -5-42	TB-360 -5-50	TB-525 -6-50	TB-525 -6-60	TB-650 -6-60	TB-750 -7-60	TB-1000 -8-72	TB-1000 -8-82
A.P.I. Working Load Strength Rating	265	265	265	265	360	360	525	525	650	750	1,000	1,000
A.P.I. Bearing Rating at 100 R.P.M.	340	340	425	425	425	425	630	630	730	850	1,525	1,525
Number of Sheaves	4	4	5	5	5	5	6	6	6	7	8	8
Diameter of Sheaves	36	42	36	42	42	50	50	60	60	60	72	82
Length Overall	7'9 3/4"	8'3 3/4"	7'9 3/4"	8'3 3/4"	7'9"	8'8"	8'10 1/4"	9'10 3/4"	10'3 1/2"	10'6 3/4"	12'9 3/4"	13'10 1/4"
Width Overall (Face)	26 5/16	26 5/16	26 5/16	26 5/16	26 5/16	28 5/16	32	32	34 3/8	38 1/2	54	54
Weight	7,025	8,085	7,300	8,365	9,100	11,100	14,300	18,200	20,500	22,100	45,200	53,200
	3,187	3,667	3,311	3,803	4,128	5,035	6,486	8,255	9,299	10,024	20,500	24,130

Ideco Tubing Blocks Specifications

Model	TB-75 -2-24	TB-75 -3-24	DUTB-75 -2-24	DUTB-75 -3-24	DTB-75 -2-24	DTB-75 -3-24
A.P.I. Working Load Strength Rating	75	75	75	75	75	75
A.P.I. Bearing Rating at 100 R.P.M.	80	120	80	120	80	120
Number of Sheaves	2	3	2	3	2	3
Diameter of Sheaves	24	24	24	24	24	24
Length Overall	4'0 3/4"	4'0 3/4"	5'3 3/4"	6'3 3/4"	5'5 1/2"	5'5 1/2"
Width Overall (Face)	16 1/2	16 1/2	16 1/2	16 1/2	16 1/2	16 1/2
Weight	1,350	1,480	2,220	2,350	1,975	2,105
With Weight Added	—	—	2,640*	2,770	2,395*	2,525
	612	671	1,007	1,066	896	955
	—	—	1,198**	1,256	1,086**	1,145

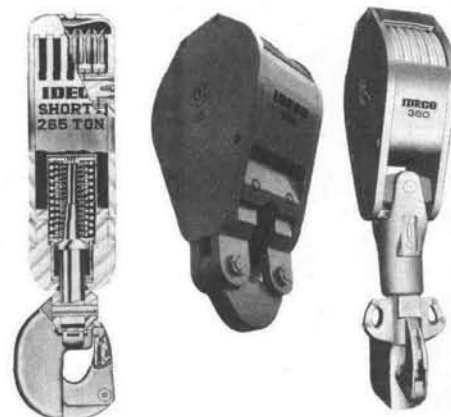

*Two Sheave Blocks only have room for additional 375 lb on center pin that is not included in this total.
 **Two Sheave Blocks only have room for additional 170.1 kg on center pin that is not included in this total.